

Installation Guide for in water V Dock Fender

Unpack V Dock.

Lay down on walkway.
Inflate all 3 x compartments.
Place V Dock in water
facing away from the boat.



Place in water
Facing away from the boat.



Attach swivel shackles.
Attach to D - Rings.
Shackle pin facing up.




Includes 316 S/S fixing kit.



Secure fender.
With a safety rope and
tie to the dock side.



Position.
The centre D - Ring
inline with
bow of boat.

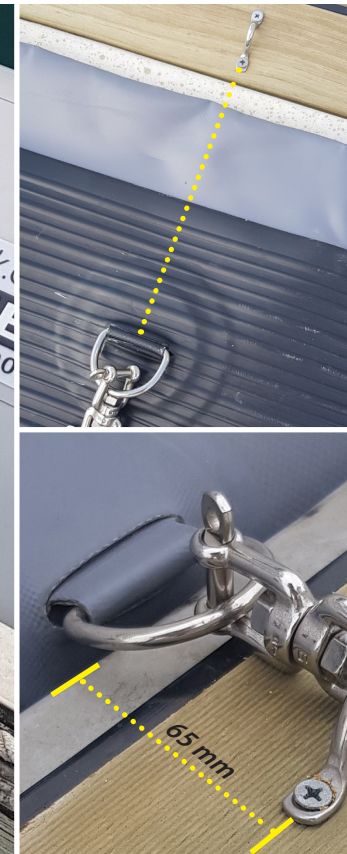

Attach half saddles.
Fix half saddles in
position.
65mm from edge.



Attach centre shackle.
Once completed attach the
other two outer half saddles
and swivel shackles.